

# PowerHawk 4206

ANSI C12.20, 0.5 multi-point sub-meter deploying up to 6 qty. 333mV CTS in non-regulated, energy management applications (NR-EM Grade). Configurable as 6 single phase, 3 two phase or 2 three phase meters. Ethernet communications with native BACnet IP, Modbus TCP/IP plus optional, integrated V.90 telephone modem or Modbus RTU interface.



## Product Numbers and Variants

| Product Number | Product Name                                 | Listings /Approvals for Revenue Applications |
|----------------|--|--|
| 910-136-01     | Triacta PowerHawk 4206 ETH (120V,60Hz)       | None   |
| 910-136-05     | Triacta PowerHawk 4206 ETH (277V,60Hz)       | None   |
| 910-136-01-RTU | Triacta PowerHawk 4206 ETH + RTU (120V,60Hz) | None   |
| 910-136-05-RTU | Triacta PowerHawk 4206 ETH + RTU (277V,60Hz) | None   |



## Features and Specifications

- Electronic solid state device configurable as:
  - 6 single-phase meters
  - 3 two-phase or three-phase Delta meters
  - 2 three-phase Wye meters
- 4-quadrant meter measures total and per phase:
  - Active, Reactive & Apparent Power
  - Peak W and VA Demand
  - PF and phase angles
  - Irms, Vrms
- Interfaces to 333mV output CTs
- Service Voltages up to 277V with no external PTs
- On-board Liquid Crystal Display
- On-board non-volatile flash memory is unaffected by power outages and holds up to 2 years of meter data (1 hour intervals for 20 years)
- On-board real-time clock with battery back-up holds time up to 10 years
- Two on-board pulse inputs (2 wire) compatible with dry form A and solid state form A contacts, collect data from other pulse-out meters (gas, water or electric)
- Multi-point economic efficiencies for retrofit or new construction
- Remotely configurable and upgradable with Ethernet connectivity

## Reporting and Communications

- AMR via FTP data push over IP or (optional) MODEM;
  - Plain text CSV file
  - Measurement Interval: 1 to 60 minutes
  - Reporting interval: once/day or every N min.
- Logged Measurements for AMR (interval and register):
  - Wh delivered & received
  - VARh delivered & received
  - VAh
  - Peak W & VA Demand
  - Present W & VA Demand
  - Peak Current
  - Vrms
  - Pulse counts x 2 inputs
- BAS Integration via BACnet IP, Modbus TCP/IP, or (optional) Modbus serial RTU.
- On-board Web server and Liquid Crystal Display for local readings
- Ethernet Interface
  - 10/100BaseT Full Duplex
  - DHCP Client or static IP address
  - Passive FTP port 21
  - NTP port 123
  - Modbus TCP/IP port 502
  - BACnet IP port 47808
  - HTTP port 80

## Internal View and Dimensions

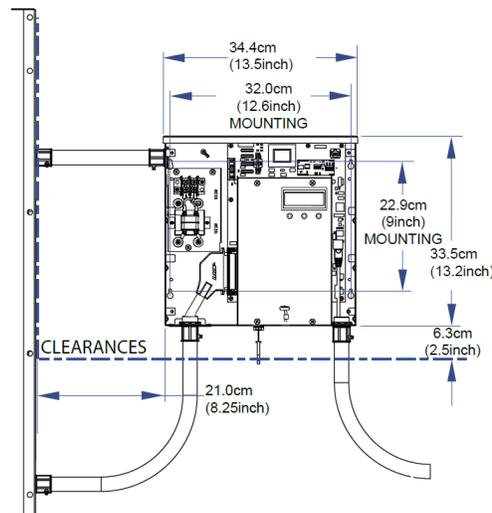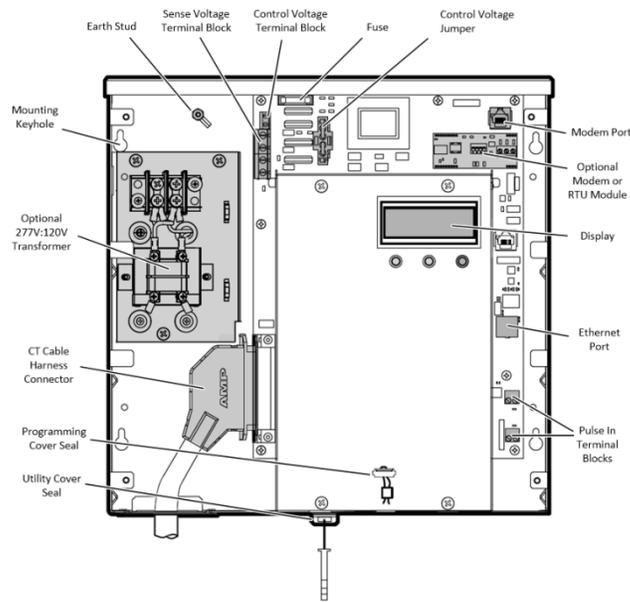

## Specifications

| <b>MECHANICAL</b>  |  |
|--|--|
| Dimensions   | Height: 13.2 in. (33.5cm)<br>Width: 13.5 in. (34.3 cm)<br>Depth: 2.5 in. (6.4 cm)  |
| Weight   | 9.5 lb (4.4 kg)  |
| <b>ELECTRICAL</b>  |  |
| Sense (Service) Voltage<br>– With control voltage jumper removed<br>– All Control Voltage variants except 277V | 100V to 300V 50/60Hz<br>– 2W+N+Protective Earth<br>– 3W+N+Protective Earth Wye<br>– 3W+Protective Earth Delta                  |
| Control Voltage and Current  | 120V variant                    +/- 12V, 125 mA 60 Hz<br>277V variant                    +/- 28V, 54 mA 60 Hz                  |
| Fuse rating (F1)   | 120V & 277V variants:    T125 mA, 250V   |
| Required Current Transformers<br>Measurement Category III  | 333 mV secondary CT<br>Must be UL recognized/listed  |
| Pulse inputs 1 and 2   | Dry form A and solid-state form A compatible.<br>Internal 3.3V pull-up<br>Maximum frequency 10 Hz<br>Minimum pulse width 20 MS |
| <b>REGULATORY</b>  |  |
| Measurement accuracy<br>(0.5% with 0.3% CTs)   | ANSI C12.1 and C12.20 Class 0.5<br>IEC 62053-22 Class 0.5S   |
| Safety   | IEC/EA/UL/CSA 61010-1 3 <sup>rd</sup> Edition, CSA C22.2, No. 61010-1-04,<br>CE directive 2014/35/EU                           |
| Emissions  | FCC Part 15, ICES 003, EN55022, IEC 6100-4-5 - Class B,<br>CE directive 2014/30/EU   |
| Surge power/telephone lines  | 47 CFR Part 68, CS-03  |
| RoHS   | CE directive 2011/65/EU  |
| <b>COMMUNICATIONS AND MEMORY</b>   |  |
| On-board Ethernet port   | 10/100 BaseT, Full Duplex  |
| On-board modem (optional)  | V.90   |
| On-board Modbus RTU serial port (optional)   | RS422 or RS485 19200/9600 Baud   |
| BACnet   | ASHRAE 135-1, BTL Listed B-SA  |
| Non-volatile memory storage  | Up to 2 years of data at 1-hour data intervals,<br>20 Years storage time   |
| <b>ENVIRONMENTAL</b>   |  |
| Operating temperature  | -20 to 70°C  |
| Operating humidity   | 5% to 90% non-condensing   |
| Usage environment  | Indoor or enclosed outdoor environment   |
| Maximum altitude   | 9843 ft (3000 m)   |
| Pollution degree   | 2  |
| Installation category  | II   |
| Measurement category   | III  |